

MAX-Quantum

interferometer



Single fiber



Fast measurement



Auto focus



Multi-fiber



Fast measurement



White light, phase shift

Fixtures for bare fiber, single and multi-fiber connectors, including MT16/32



USB 3.0 SuperSpeed connection

Weight 10.6 lbs

What makes it unique?



Large field of view



Large imaging sensor



High resolution



High contrast optics



Reliable scratch detection



MT16/32 in one scan




Additional parameters


Additional MT ferrule parameters required by IEC

- angles and offset of fiber holes
- angles and parallelism of guide holes


- angles and parallelism of guide holes

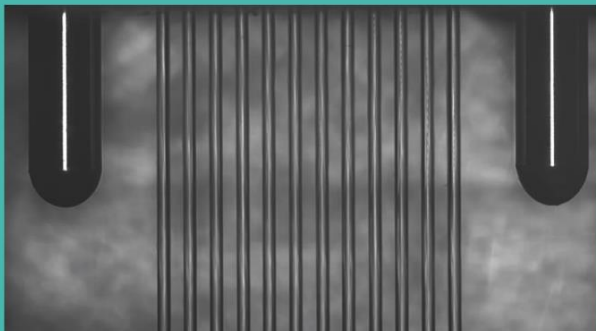

Side view of MT bare ferrule with inserted pins and fibers obtained with True Position™ fixture


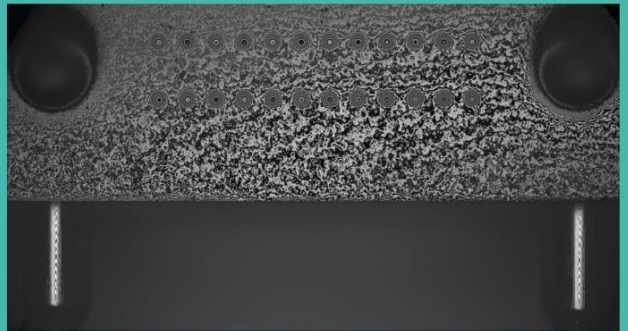


Side+front view of MT ferrule with pins obtained with MAX-SVF-series fixture



Applications

- Single and Multi-fiber Patchcords
- Mil Spec Termini
- Laser Cleaved Ribbons
- Cleaved Bare Fiber
- Bare Ferrule
- Large Diameter Fiber
- Flat Polish

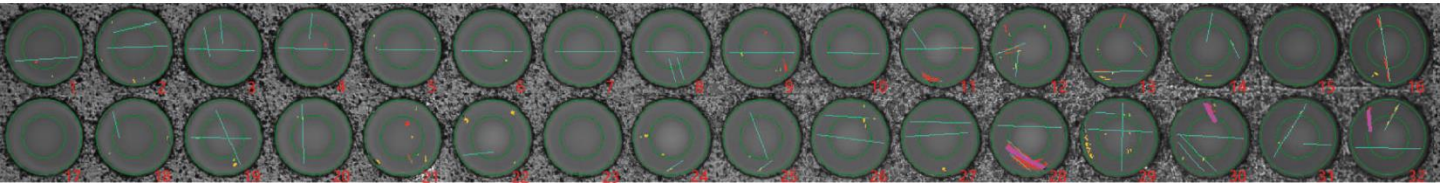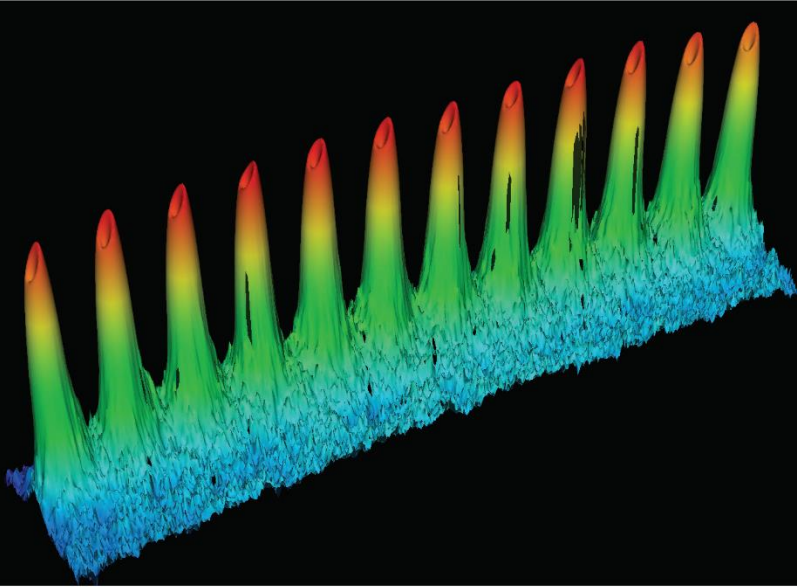

Specification

Repeatability C.F.*: ROC: 0.9% (MT12); 0.04% (SC/APC)
 Fiber Height: 0.8 nm (MT12); 0.1 nm (SC/APC)
 Angles: 0.005 deg (MT12); 0.0002 deg (SC/APC)
 Apex Offset: 0.04 μm (SC/APC)

Repeatability C.R.:** ROC: 1.2% (MT12); 0.05% (SC/APC)
 Fiber Height: 1.1 nm (MT12); 0.4 nm (SC/APC)
 Angles: 0.01 deg (MT12); 0.006 deg (SC/APC)
 Apex Offset: 1.0 μm (SC/APC)

* Values were calculated from 30 consecutive measurements without interaction on connector between measurements (connector fixed) and represent one sigma value.

** Values were calculated from 30 consecutive measurements with removing and inserting connector between measurements (connector reloaded) and represent one sigma value.

Dimensions (H x W x L): 181 mm x 213 mm x 117 mm (7.13 in x 8.39 in x 4.61 inches)

Weight: 4.8 kg (10.6 lbs)

Power supply: external, USB 3.0 cable, 12 V DC power adapter


 software supplied with Sumix probes

SENKO[®]
 Advanced Components

For more information or get a demo unit, contact your local Senko sales person or email us at sales@senko.com.