



LC CONNECTOR BOOT OPTIONS


Standard Connector MINI Boots



B MINI 900µm
931-MINI-X-ON

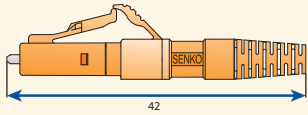


C MINI 2.0mm
931-MINI2-X-ON

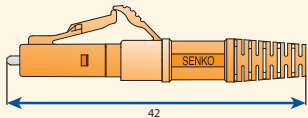


D MINI 3.0mm
931-MINI3-X-ON


Unibody Connector MINI Boots



B MINI 900µm
931-UNI1-X-ON




C MINI 2.0mm
931-MINI2-X-ON





D MINI 3.0mm
931-MINI3-X-ON

Standard Connector Boots

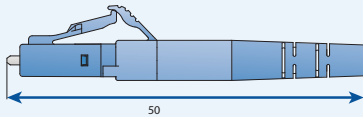


2 2.0mm Original
BTLC-2-X-ON

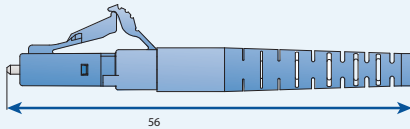


6 3.0mm Boot
931-JCB3-X-ON



Unibody Connector Boots




4 2.0mm Round
931-JCB-X-ON

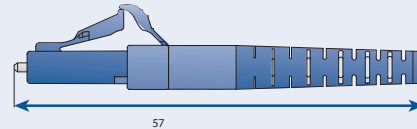


6 3.0mm Boot
931-JCB3-X-ON




More Boots Options

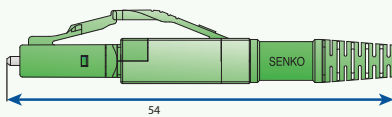


LC Switchable with MINI Boot 3.0mm
931-MINI3-X-ON

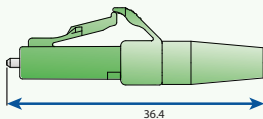


5 2.0mm Short Boot
931-JCBS-X-ON



Flex Angle Boots

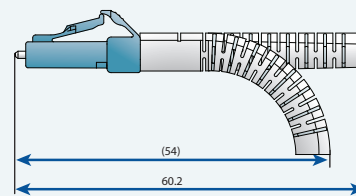

7 2.0mm Flex Angle Boot
931-JCBF-X-ON

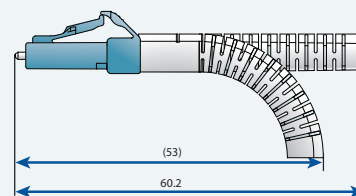

9 3.0mm Flex Angle Boot
931-JCBF3-X-ON

Note: 1. X=Color Code

W=White, G=Green, L=Blue, B=Black, A=Aqua, R=Red

2. When using Flex Angle Boot, always maintain the proper bend radius per the cable manufacturer's specification