SENKO®
Advanced Components

DATA SHEET

SENKO SN® INSERT-EXRACT TOOL

Tool Part Number:
RMT-203

Hyper Scale | Fiber To The Home | Fiber To The Antenna | Network Installation

FEATURES:

- Works for both SN® and SN®-MT assemblies.
- Slender jaw for accessing assemblies without disrupting the adjacent assemblies in high density applications.
- Robust steel housing for high strength and long tool life.
- Ergonomic no slip grips for ease of use.
- Locking feature for closing jams for reducing storage space.
- Easy to use by right and left handed operators.
- REACH and RoHS compliant.

DIMENSIONS:

Length:212.7mm (8.375")
Width: 3.2mm (0.13")
Height:70mm (2.75")

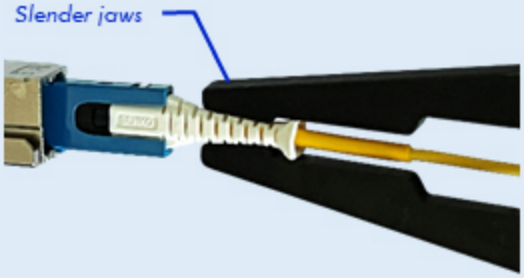

www.senko.com/product/senko-ripley-sn-insert-extract-tool/

UNLOCKING AND LOCKING SN® INSERT-EXTRACT TOOL

To Unlock: Slide the lock towards the handle grips.

To Lock: Hold the grips together and slide lock towards jaws.

INSERTING OR EXTRACTING A SN® ASSEMBLY

1. Unlock the tool.

2. Grip the jaws onto the connector's push-pull boot.

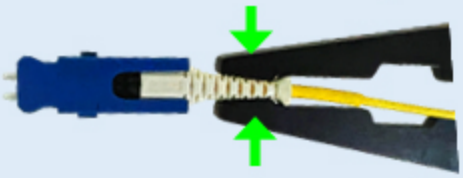

3. Move the in straight line to insert or extract the cable assembly for the adapter or transceiver port.

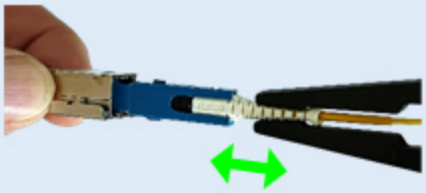

PRO TIPS FOR HANDLING SN® CABLE ASSEMBLIES

Replace the protective end caps and port plugs on unmated assemblies and transceiver ports to avoid accidental contact with the end faces.

Make sure both ends of the connector pair are clean before mating.

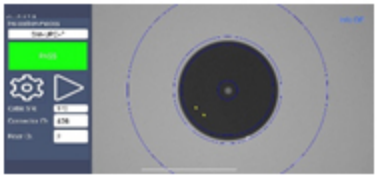

For more information or questions, please contact your local SENKO sales representative or email us at sales@senko.com

www.senko.com