



# SN® UNIBOOT CONNECTOR


More flexibility, less hardware



**ELIMINATE**  
cassettes and fan-outs

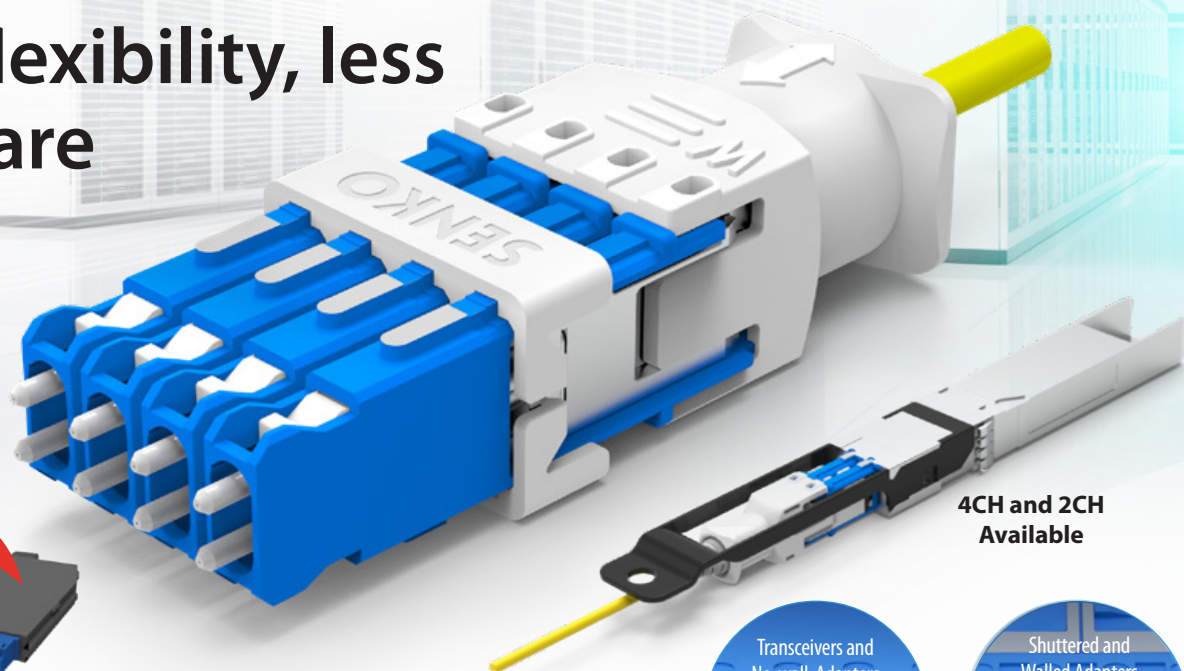

**4CH and 2CH**  
**Available**



**Narrow Pitch**



**Wide Pitch**

The SN® Uniboot combines four duplex SN connectors into a single compact and practical 8-fiber connector. This unique design means the SN® Uniboot supports Base-2 equipment connections and Base-8 trunk and transceiver connections simultaneously.

## TELCO-grade Optics Designed for the Data Center

- Telco grade optics with 1.25 mm zirconia ferrules
- Lower insertion loss vs MPO equivalent
- More headroom and extended reach



### FEATURES

- Fast patching with uniboot design
- Base-8 and Base-2 compatibility
- Allows up to 432 fibers per 1RU (Rack Unit)
- Provides ferrule-based alternative to MPO
- Increased flexibility and extended reach
- Significantly lower total cost of ownership
- Less complexity versus MPO
- Suitable for adapters with or without walls between ports

Direct Breakout Patent US11474315B2 and US11675137B2

## SN UNIBOOT CONNECTOR

# SIMPLE. SCALABLE. SUSTAINABLE.



### MEGA-Density

The SN is 40% more compact than legacy LC, but nearly 3 x denser when integrated in patch panels. Up to 432 fibers can be presented in 1RU




### Lower Overall Cost

SN topologies require no conversion between high fiber-count trunk cables and duplex equipment ports. This means that transition cassettes and fanouts are not required




### FAST PATCHING

400G spread in as easy as 1-2-3

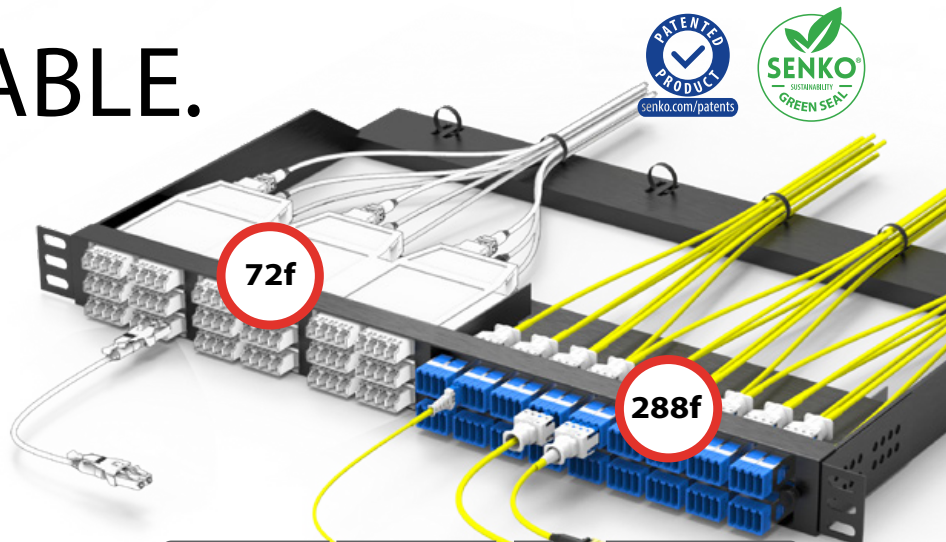

### Base-8 & Base-2

The SN Uniboot is so flexible that it can be used as a high-density trunk connection, a 4-lane transceiver link or as a duplex patching interface

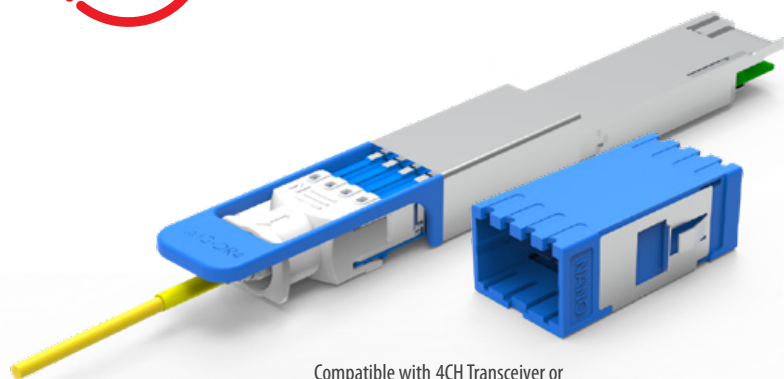

Compatible with 4CH Transceiver or  
694 SN 4CH No Wall Adapter



Compatible with 694W SN 4CH with Wall Adapter or  
69D SN 4CH Shuttered Adapter



Narrow Pitch

Wide Pitch