

XP FIT PLUS TERMINATION KIT

The Connector Installation Tool Kit contains everything needed for installation of the SC and LC XP FIT PLUS connectors.

No epoxy, polishing film, or other consumables are required, and there is no need for electrical power, allowing installers to get in and out of installation sites quickly.



ORDER CODE: **X P F - P - F**

KIT Content with Flat Cleaver

	TOOL	SENKO PN
Kit Including Single Action Cleaver	Jacket and 250µm Fiber Stripper + 125µm Buffer Remover	AFT-T-223-H
	Thermal Buffer Removal Tool	AFT-T-TBR
	Replacement Blade Set	AFT-T-TBR-R
	Precision Cleave Tool (Flat)	AFT-T-CL-SMT
	Lint Free Dry Wipes	AFT-A-KW
	Fiber Optic Cleaning Pen	AFT-A-EWP
	Kevlar Scissors	AFT-T-KS
	Fibre Disposal Unit	AFT-A-FU
	Fine Permanent Marker Pen	AFT-A-PMB
	Fibre Checker	AFT-G-FC
	2.5mm to 1.25mm Adapter	AFT-G-CAC
	Soft Case	AFT-A-CS-XP

KIT Content with Angled Cleaver

ORDER CODE: **X P F - P - A**

The contents of this Kit are the same as the XPF-P-F, but alternatively, includes an Angled Cleaver.


XP FIT PLUS

CONNECTOR TOOLS

The XP Fit Plus Connectors are supplied in conjunction with specific tools for easy termination in the field.

The XP Fit Plus SC 900µm pack includes:

- 10 pcs. SC SM PC connectors
- 10 pcs. Boots
- 1 Fiber Holder
- 1 Assembling Jig

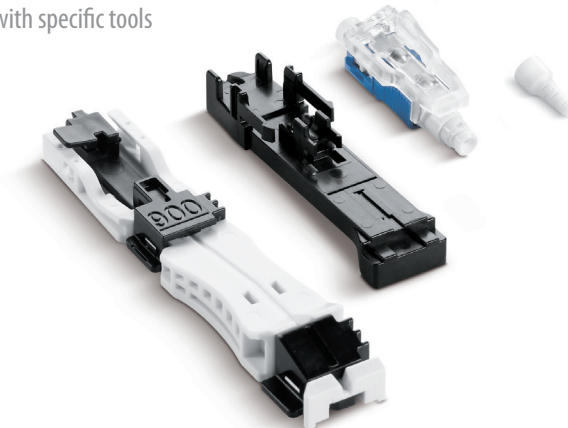

The same tools are provided for LC XP FIT PLUS.

FEATURES

- Fast installation to minimize onsite labour costs.
- Compatible with conventional LC & SC Connectors
- Easy operation
- Quick assembly in under 2 minutes
- No adhesive or polishing required
- Compact tool without electric power

XP FIT PLUS

SC FIELD ASSEMBLY CONNECTOR



The SENKO XP Fit Plus is a pre-polished, pre-assembled connector compatible with standard SC and LC connectors. No epoxy is required as an internal mechanical grip effectively holds the fiber in place and can be installed in under two minutes. Without polishing or adhesives, the XP Fit Plus makes on site installations quick and easy, diminishing the need for epoxy curing and hand polishing at the work site. The XP Fit Plus comes with an assembly jig and fiber holder for 250µm and 900µm tight buffered fiber, ensuring accurate alignment and fiber cleave when terminating.

XPfit Plus SC Connector 900µm

TYPE	PART NUMBER	DESCRIPTION	COLOR		
			HOUSING	BOOT	DUST CAP
SM PC	318-191-627	XPfit Plus SC Connector SM PC 900µm	Blue	White	Transparent
SM APC	318-091-427	XPfit Plus SC Connector SM APC 900µm	Green	White	Transparent
MM 50/125	318-291-727	XPfit Plus SC Connector MM 50/125 900µm	Black	White	Transparent
MM 62.5/125	318-391-927	XPfit Plus SC Connector MM 62.5/125 900µm	Beige	White	Transparent
MM 50/125 10G OM3	318-491-527	XPfit Plus SC Connector MM 50/125 10G OM3 900µm	Aqua	White	Transparent

ORDER CODE EXAMPLE:

318-491-527

XPfit Plus SC Connector 250µm

TYPE	PART NUMBER	DESCRIPTION	COLOR		
			OUTER HSG	BOOT	DUST CAP
SM PC	318-191-617	XPfit Plus SC Connector SM PC 250µm	Blue	White	Transparent
SM APC	318-091-417	XPfit Plus SC Connector SM APC 250µm	Green	White	Transparent
MM 50/125	318-291-717	XPfit Plus SC Connector MM 50/125 250µm	Black	White	Transparent
MM 62.5/125	318-391-917	XPfit Plus SC Connector MM 62.5/125 250µm	Beige	White	Transparent
MM 50/125 10G OM3	318-491-517	XPfit Plus SC Connector MM 50/125 10G OM3 250µm	Aqua	White	Transparent

ORDER CODE EXAMPLE:

318-091-417

XP FIT PLUS

LC FIELD ASSEMBLY CONNECTOR



XPfit Plus LC Connector 900µm

TYPE	PART NUMBER	DESCRIPTION	COLOR		
			HOUSING	BOOT	DUST CAP
SM PC	951-191-111	XPfit Plus LC Connector SM PC 900µm	Blue	White	Transparent
MM 50/125	951-291-811	XPfit Plus LC Connector MM 50/125 900µm	Black	White	Transparent
MM 62.5/125	951-391-211	XPfit Plus LC Connector MM 62.5/125 900µm	Beige	White	Transparent
MM 50/125 10G OM3	951-491-911	XPfit Plus LC Connector MM 50/125 10G OM3 900µm	Aqua	White	Transparent

ORDER CODE EXAMPLE:

951-491-911

APPLICATIONS

- Telecommunications
- Network Monitoring
- FTTH

FEATURES

- Highly Stable & Reliable
- Perfect Performance
- Compact Package
- RoHS Compliant

