


SC SHUTTERED

CONNECTOR WITH LOW BENDING OPTICAL CORD


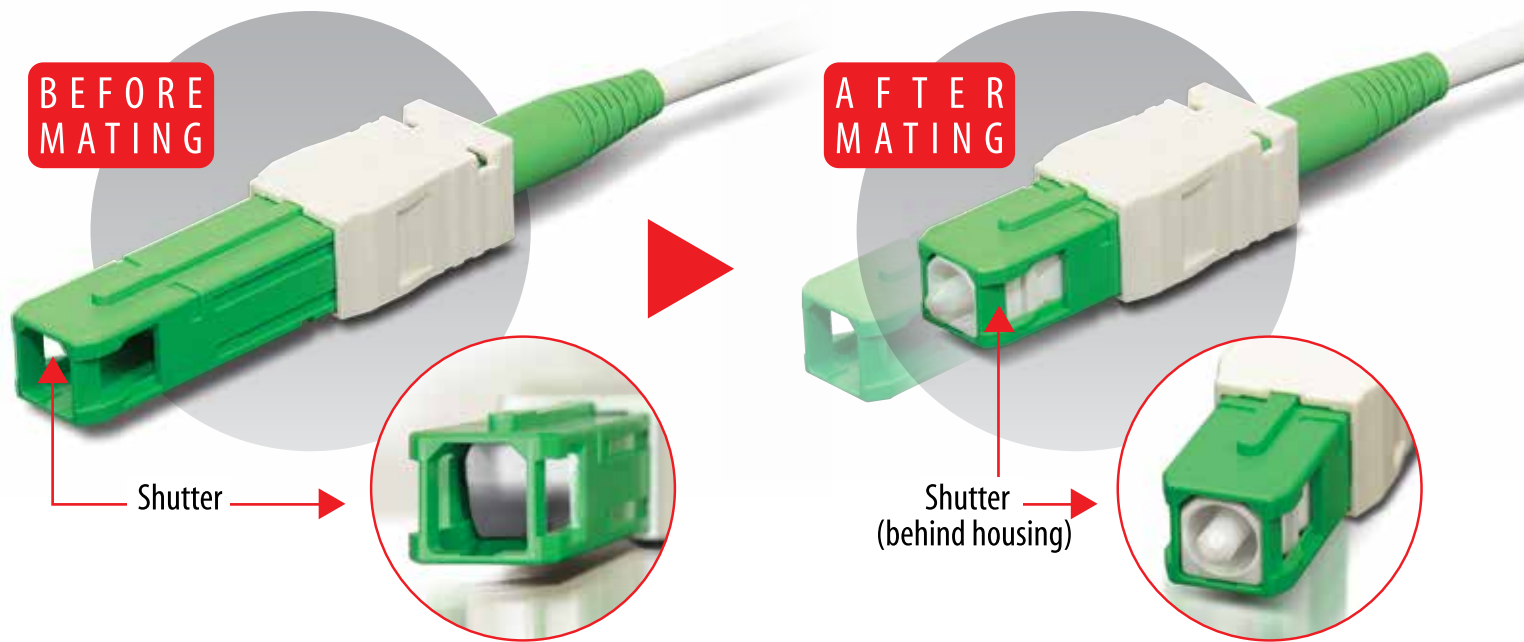


Superior Dust and Laser Protection

The SC Connector has a internal Safety shutter to prevent accidental light transmittance and dust entry. The unique design prevents ferrule end face.

FEATURES

- Can mate to any deployed SC Adapter
- Connector design prevents exposure of ferrule tip, preventing fiber end contamination
- Metal Shutter prevents accidental light transmittance
- Works as a standard SC with the added shutter features
- Easy insertion into Adapter with Guide Key

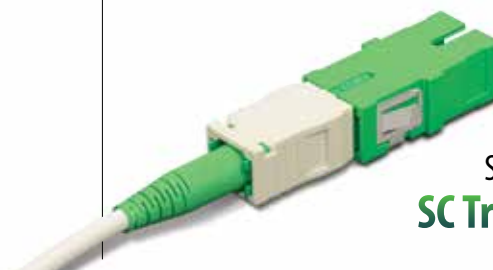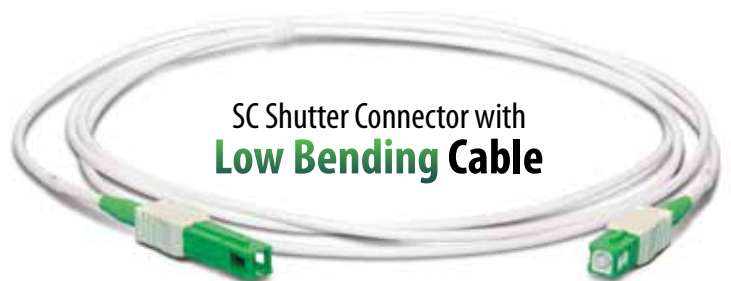



LOW BEND R5 OPTICAL CORE



FEATURES

- Minimum Bend Radius of 5mm
- ITU-T G.657.B2/B3 fiber technology for low bending loss
- Very low wavelength-dependent bend
- Highly reliable and User-Friendly, ideal for demanding FTTH installation
- Available in ruggedized cable jacketing, suitable for home use

BENCHMARK:
INTERNATIONAL STANDARDS COMPLIANT
Smallest Bending Radius in ITU-T Standards

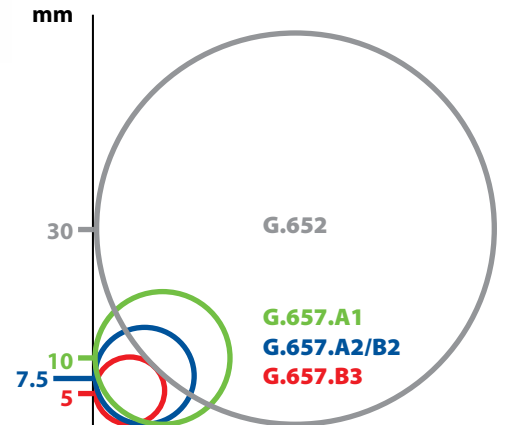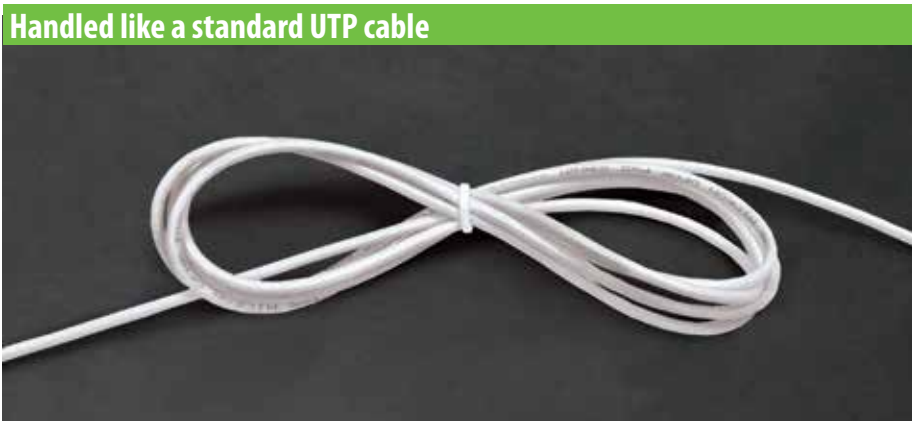

G.657 (2012)	
For access networks G.652.D compliant all bands 1260-1625nm	For end access networks (e.g., in/near buildings) G.652.D compliant all bands 1260-1625nm
A1 Rmin = 10mm	B2 Rmin = 7.5mm
A2 Rmin = 7.5mm	B3 Rmin = 5mm

SENKO ADVANCED COMPONENTS, INC.

America
USA EAST 1-888-32-SENKO
USA WEST 1-858-623-3300
TEXAS 1-972-661-9080
Sales-Americas@senko.com

South America
BRAZIL +55-21-3736-7065
Sales-Brazil@senko.com

Asia
HONG KONG +852-2121-0516
SHANGHAI +86-21-5830-4513
SHENZHEN +86-755-2533-4893
Sales-Asia@senko.com

Europe
FRANCE +44 7939364565
Salesfrance@senko.com
GERMANY +49(0)15117683072
Sales-Germany@senko.com
ITALY +39 338 8919089
Sales-Italy@senko.com
POLAND +44 (0) 7796444488
Sales-Europe@senko.com

SPAIN & PORTUGAL +34 678042829
Sales-Iberia@senko.com
UK +44 (0) 1256 700880
Sales-UK@senko.com
OTHER +44(0) 1256 700880
Sales-Europe@senko.com

Asia Pacific
AUSTRALIA +61 (0) 3 9755-7922
Sales-Asia-Pacific@senko.com

Middle East North Africa
DUBAI +971 4 8865160
Sales-MENA@senko.com

Japan
TOKYO +81 (0) 3 5825-0911
Sales-Japan@senko.com

CALL 1-888-32-SENKO